


# TR200 SERIES

TR208 | TR210



2" Cut Capacity

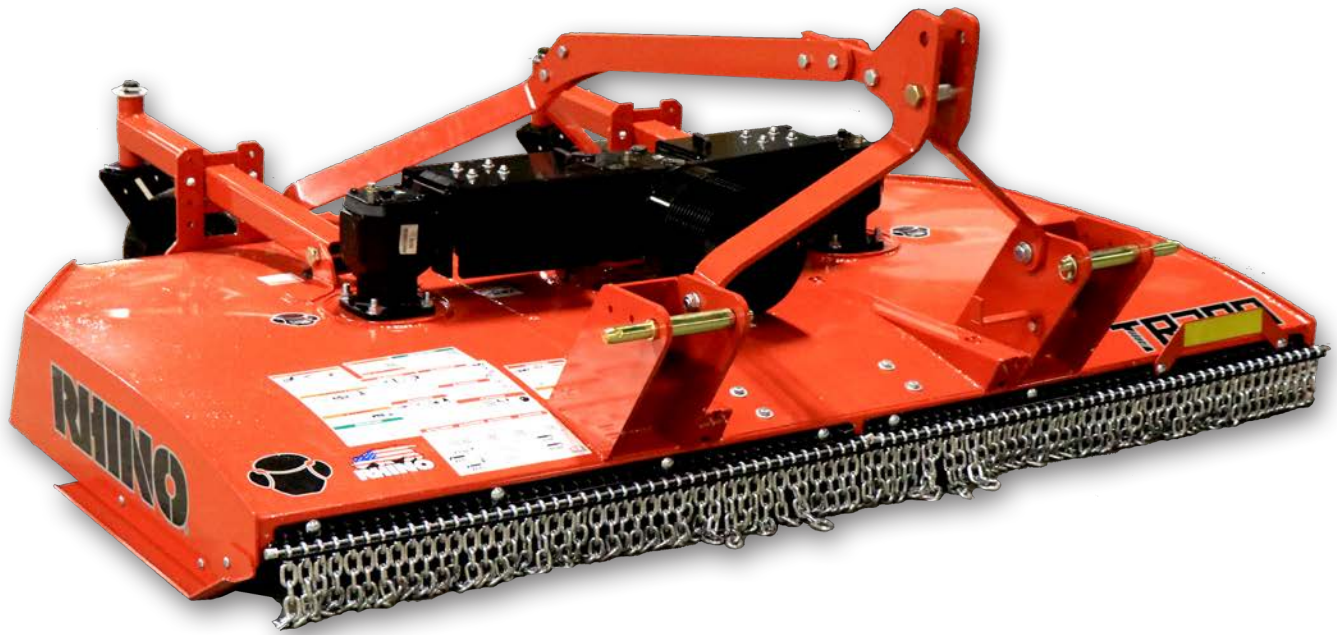

Infinity Blade Carrier



EZ Clean Domed Deck



1/2" x 3" Blades



5 Year Limited Gearbox Warranty



Single or Double Chain Guards  
(Single Chain Guards on TR208)



Cat 4 Driveline (Lift Type/Pull Type)



Low HP Requirements



# TR 200 SERIES

## SPECIFICATIONS

| Specifications        | TR208  | TR210   |
|-----------------------|--|---|
| Cutting Width:        | 96"  | 120"  |
| Overall Width:        | 103"   | 127 1/4"  |
| Overall Length:       | 91" (Lift), 138" (Pull)  | 106 1/2" (Lift),<br>149 1/2" (Pull)             |
| Cutting Height:       | 1" – 16"   | 1" – 15"  |
| Height Adjustment:    | 2.5" x 8" Cylinder (Pull)  | 2.5" x 8" Cylinder (Pull)                       |
| Hitch:                | CAT 2/ CAT 3 Std.<br>CAT 2/ CAT 3 Q.H.,<br>Pull  | CAT 2/ CAT 3 Std.<br>CAT 2/ CAT 3 Q.H.,<br>Pull |
| Blade Carrier:        | Infinity - Steel   | Infinity - Cast                                 |
| Blades:               | 1/2" x 3" Parallel Updraft   | 1/2" x 3" Parallel Updraft                      |
| PTO HP Required:      | 45 (Lift), 30 (Pull)   | 60 (Lift), 45 (Pull)                            |
| Gearbox Rating*:      | 100 HP (Center),<br>65 HP (Outboard)   | 100 HP (Center),<br>130 HP (Outboard)           |
| Blade Tip Speed:      | 14,661 FPM (540 RPM)   | 16,969 FPM (540 RPM)<br>16,694 FPM (1000 RPM)   |
| Cutting Capacity:     | 2"   | 2"  |
| Driveline Size:       | Cat 4 (Lift, Pull)   | Cat 4 (Lift, Pull)                              |
| Driveline Protection: | Slip Clutch  |   |
| Deck Thickness:       | 12 Ga  |   |
| Side Skirt:           | 7 Ga   |   |
| Tire and Wheel:       | Laminated Tires 4" x 8" (Lift)<br>Laminated 6" x 9" x 20.75" (Pull)<br>RhinoTrax Foam Filled 7" x 12" x 20.5" (Pull) |   |
| Safety Deflector:     | Single Chain Guards  | Single or Double<br>Chain Guards                |
| Warranty:             | 1 Year Machine, 1 Year Limited Driveline,<br>5 Year Limited Gearbox  |   |



\*Gearbox power rating based on actual field performance.



1020 S. Sangamon Ave | Gibson City, IL 60936  
TEL: 800-221-2855 (Opt 1)

[WWW.RHINOAG.COM](http://WWW.RHINOAG.COM)

